


Adjustable


Easily adjustable. One size fits all walkways, 1.5m, 1.8m, 2.1m longitudinally and 3.0m transversely.

Overhangs provide shelter from diagonal rain between walkways and site sheds.

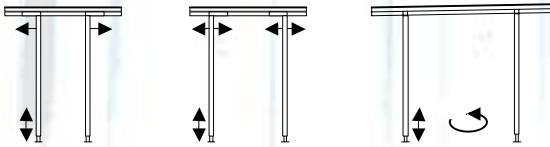

1.5 m - 2.1m - 3.0m

Parts List

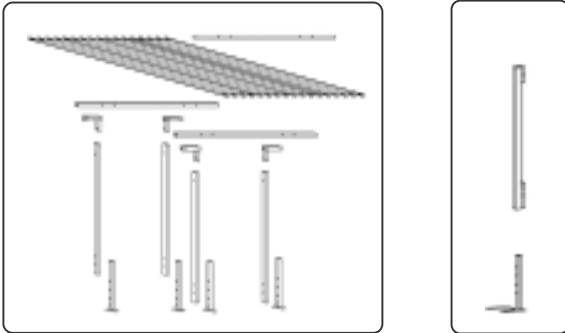

Unit



Parts

RCWs can be purchased as a single unit module (pictured above),

or ordered as individual parts. Complete parts list available.

Specifications

Unit

Roofing.	Polycarbonate roofing (80% heat reduction tint.)
Frame.	50 x 25 x 1.6mm / 3m Galvanized box section
Posts.	65 x 65 x 1.6 mm Galvanized box section
Elbows.	60 x 60 x 1.6 mm / 50 x 25 x 2.5 mm Gal Box section
Stands.	60 x 60 x 1.6 mm / 65 x 4 mm Galvanized box section.
Fixings.	35 mm Tec screws / neo washers. 35 - 75 x 8mm bolts.

Anchores

Permanent.	In situ Disposable stirrups.
Semi permanent.	8mm Dyna bolts
Temporary.	400 x 400 x 50mm concrete pavers
To Sheds	Struts 65 x 65 x 1.6 mm Gal box section.

Equipment

Props.	35 x 35 x 1.6 mm Gal box section.
Cross Brace.	3000 x 1150 x 6mm. Every 4 th unit.

Transport

Components.	20 separate parts.
Largest component.	4500 x 1500 x 75 mm.
Volume	4500 x 1635 x 150 mm
Weight of heaviest component	40kg
Overall Weight	140 Kg
Stack ability	Maximum 10 units

Contact:

For More Information

Now Covered Walkways are Reusable



Pictured above: **DRYWAY RIDGE** Model

for Industrial Sitedsheds
and
Freestanding Walkways

Construction time 25 min.*

Complies with all Australian Standards

Modular Canopies Pty Ltd
www.modularcanopies.com.au
Patent Applied: 2005242208

*per module, free standing.



The Future of Covered Walkways is here.

Features

Saves Time and Money



Simple Installation



Stackable



Transportable




Durable



5 Easy Step



Versatile

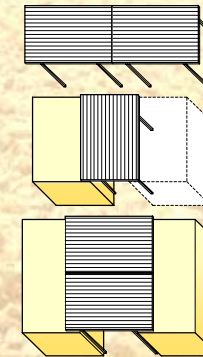

Free Standing

Single Sided

Double Sided

3 meter
Double Sided

Our Reusable Covered Walkway system (RCW) is designed to replace in situ covered Walkways. This durable and long

lasting product is structurally engineered to withstand extreme weather conditions and the rigours of building sites.

Each unit is transportable and can be installed using a two person procedure in approximately 25 minutes.

No mechanical lifting or scissor lifts necessary. After use they are easily dismantled and stacked ready for use.

RCW Systems are modular, catering for all variety of walkways.

Suitable for free standing, single sided and double sided installation.